

Product datasheet

ENGO manifold zone actuator

Easy to install with a simple, first-open function, and a low energy consumption of just 2W.

The ENGO actuator provides efficient and reliable isolation for your underfloor heating system.



Technical:

- Dimensions: 41mm x 65mm x 41mm
- Valve connection: threaded ring nut M30 x 1.5mm
- IP rating: IP54/11
- Actuator stroke: max 4.5mm

Electrical data:


- Power supply: 230V AC 50/60Hz
- Power consumption: 2W
- IMAX: 300mA - 200mS
- Electrical cable: 90cm

Performance:

- Initial opening time or closing time: 75 seconds
- Final opening time or closing time: 180 seconds

Features:

- Easy to install
- Engineered to last
- Removable pin for first open function
- Low power consumption
- Open / closed indication
- 5-year warranty

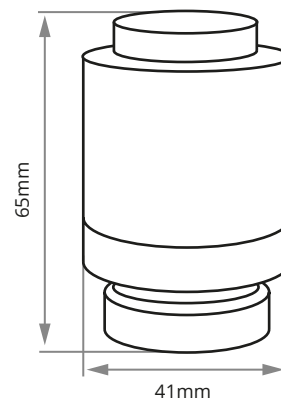

About us

No ifs, no buts. The award-winning Continal® service means you get an underfloor heating system delivered to you on time, on site, every time, no compromise.